


Complete Technology and Product Solutions

完美的技术和产品解决方案

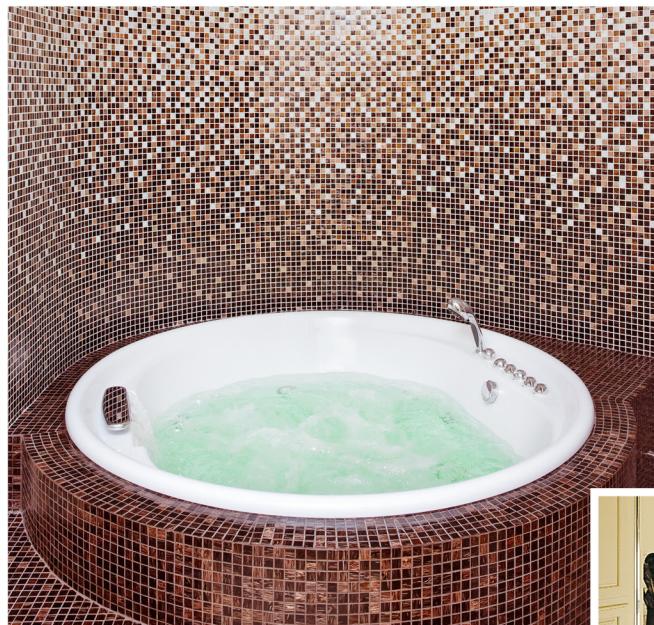

卫生洁具及小型泳池
Sanitary Wares and Swimming Pools

卫生洁具及小型泳池

Sanitary Wares and Swimming Pools

	名称 Name	特性和应用领域 Characteristics and Applications
胶衣 Gelcoat	MAXGUARD™ SX XXXXX S	杰出的耐候性、耐热水性、保光性，适合高档的卫浴产品。 Premium gelcoat, eximious UV and hydrolysis water resistance, gloss protect, for premium sanitary products.
	MAXGUARD™ GN XXXXX S	优异的耐候和耐热水性能，适合高档的卫浴产品。 Premium gelcoat, excellent UV and hydrolysis water resistance, for premium sanitary products.
	MAXGUARD™ GN0000 SC	优异的耐候和耐热水性能，经英国劳氏船级社和挪威 D.N.V 认证，适合高档的仿玛瑙及透明卫浴产品。 Premium clear gelcoat, excellent UV and Hot water resistance, complies with Lloyd's and D.N.V rules for premium transparency culture marble or onyx products.
	MAXGUARD™ GM XXXXX S	间苯新戊二醇基体，具有珠光装饰效果。 Premium gelcoat, pearlescent.
	ENGUARD™ GE XXXXX S/H	良好的耐候性和耐水性，适用通用的卫浴产品。 Good UV and water resistance for general sanitary products.
树脂 Resin	高性能浇铸树脂 AROPOL™ 7132 series resins High Performance Solid Surface	非触变、预促进，高品质间苯新戊二醇型浇注树脂，通过美国 ANSI Z124.6-1990 测试，具有优异的机械强度、耐老化和抗污性能，特别推荐制作高品质的人造石实体面材。 Non-thixotropic, pre-accelerated, high quality ISO-NPG casting resins. Passed USA ANSI Z124.6-1990 test. It is recommended for high quality solid surface application.
	间苯型浇铸树脂 AROPOL™ S138 series resins Iso Solid Surface	非触变、非促进，间苯型浇注树脂，具有优良的耐老化、抗污性能和高透明度，适用于制造高性能人造石、台面板。 Non-thixotropic, non-accelerated, Iso-resin. Excellent UV, stain resistance and transparency. It is recommended for high quality culture marble and solid surface.
	邻苯型浇铸树脂 AROPOL™ S 380 series resins Ortho Solid Surface	非触变、预促进，高活性邻苯型浇注树脂，具有较高的机械性能和表面硬度，可添加高含量填料；特别推荐用于具有高强度人造石、实体面材、有色颗粒及聚酯混凝土制品。 Non-thixotropic, pre-accelerated casting resin of high reactivity. High filler loading. It is especially recommended for high strength culture marble, solid surface and polyester concrete.
	亚克力粘结树脂 AROPOL™ AF 50405 series resins Acrylic Bonding Resin	触变、预促进，快固化压克力粘结树脂，具有优秀的机械性能和粘结性能，可添加高含量填料；特别推荐用于压克力浴缸、SPA 缸和小型泳池制作。 Thixotropic, pre-accelerated acrylic bonding resin, excellent adhesion to acrylic sheet and mechanical properties and fast cure with high filler loading. It is especially recommended for acrylic batch tubs, SPA tubs and acrylic swimming pools.
	低苯乙烯挥发树脂 AROPOL™ M 105 series resins Low Styrene Emission Resin	邻苯型低挥发通用树脂，采用手糊和喷射工艺制造复合材料结构件。 Low emission resin, suitable for spray-up and hand lay-up processes for fabricating composite structure.
	间苯型树脂 AROPOL™ K 530 TB Iso Hand Lay-up Resin	触变，预触进间苯型手糊 / 喷射树脂，较好的耐水性能，英国劳氏船级社认证。 Thixotropic, pre-accelerated, isophthalic resin for hand layup and spray layup, good water resistance, Lloyds certificate.

*以上仅为部分产品介绍，如欲了解更多亚什兰在此行业中的产品信息，请与亚什兰联系。

亚什兰（中国）投资有限公司

亚什兰高性能材料

上海市中山南二路 1089 号

徐汇苑大厦 18 层，200030

电话：+86 21 2402 4880

电邮：apmasiacustomerservice@ashland.com

www.ashlandchina.com

